

Type P.M.2.

“ POWER ” OUTPUT VALVE

Price 10/6
(In I.F.S. 11/9)

Application.


Small power output valve.

Characteristics.

- *Anode Impedance 4,400 ohms
- *Amplification Factor 7.5
- *Mutual Conductance 1.7 mA./Volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

Max. Filament Voltage 2.0 volts
 Filament Current 0.2 amp.
 Max. Anode Voltage 150 volts

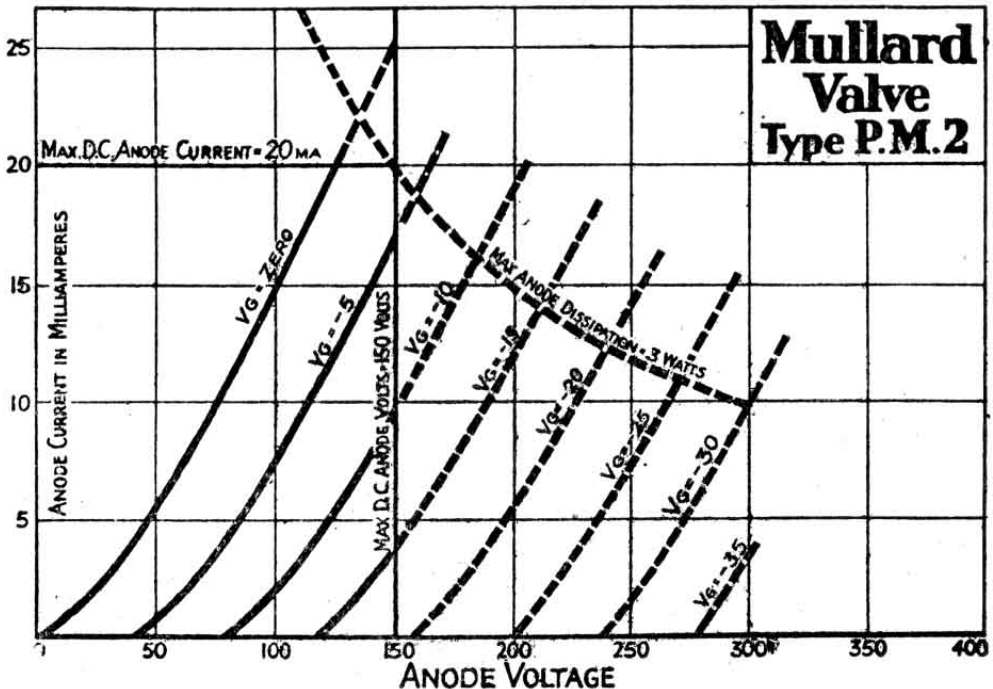

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	7.5	4.0
125	9.0 to 10.5	5.3
150	12.0	6.6

Mullard the Master Valve