


Type P.M.252

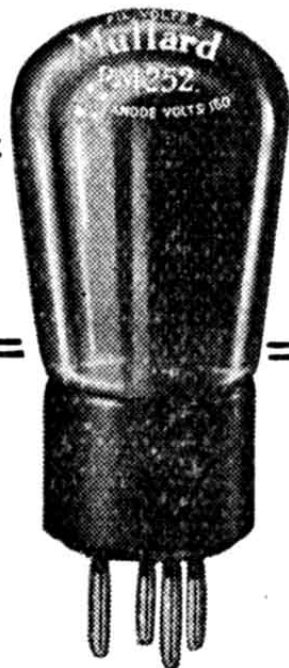

“ SUPER-POWER ” OUTPUT VALVE

Price 13/6
(In I.F.S. 15/-)

Application.


Super-power valve.

Characteristics.

- *Anode Impedance 1,900 ohms
- *Amplification Factor 7.0
- *Mutual Conductance 3.7 mA./volt
- *At Anode Volts 100; Grid Volts, Zero.

Operating Data.

- Max. Filament Voltage 2.0 volts
- Filament Current 0.4 amp.
- Max. Anode Voltage 150 volts

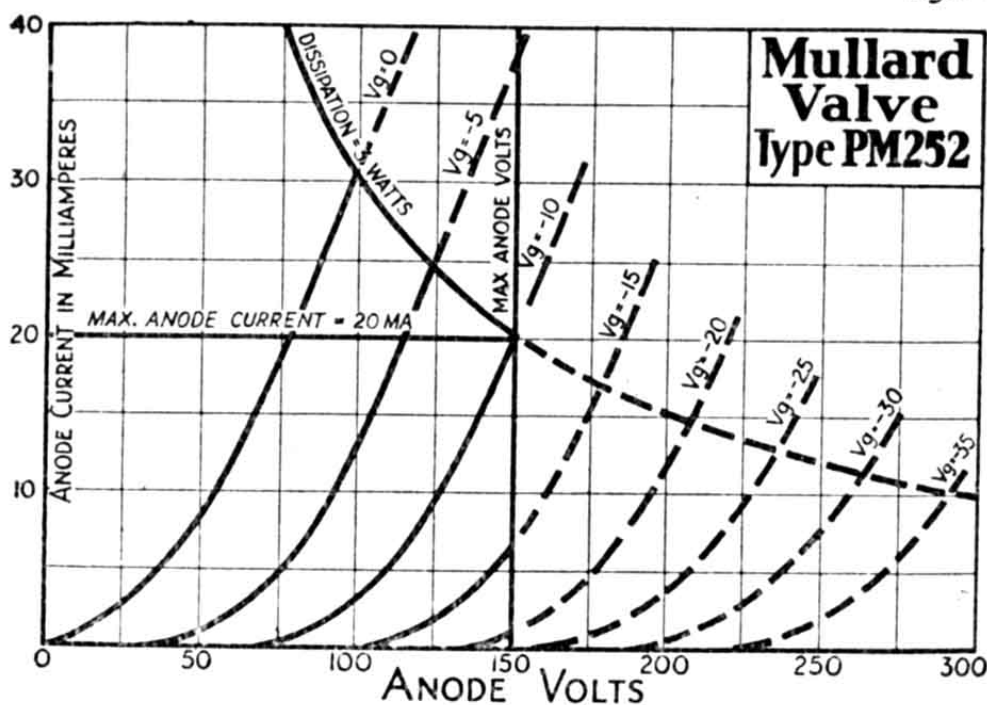

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	6.0	11.0
125	7.5 to 10.5	14.0
150	9.0 to 12.0	17.0

Mullard the Master Valve