

# T.H.4

# TRIODE-HEXODE FREQUENCY CHANGER



### OPERATING DATA.

Heater Voltage	.. ..	4.0 V.
Heater Current	.. ..	1.0 A.
Max. Anode Voltage	.. ..	250 V.
Max. Screen Voltage (Grids 2 and 4)	.. ..	90 V.
Max. Oscillator Anode Voltage		150 V.

### BULB FINISH.


The T.H.4 is supplied with a metallised bulb only.

### APPLICATION.

As frequency changer in super-heterodyne receivers covering short wavebands. It consists of a hexode mixer and triode oscillator located on a common cathode assembly with adequate screening between each electrode system. It maintains its efficiency excellently at the high frequencies.

### BASE.

Standard 7-pin type. For connections see page 109.

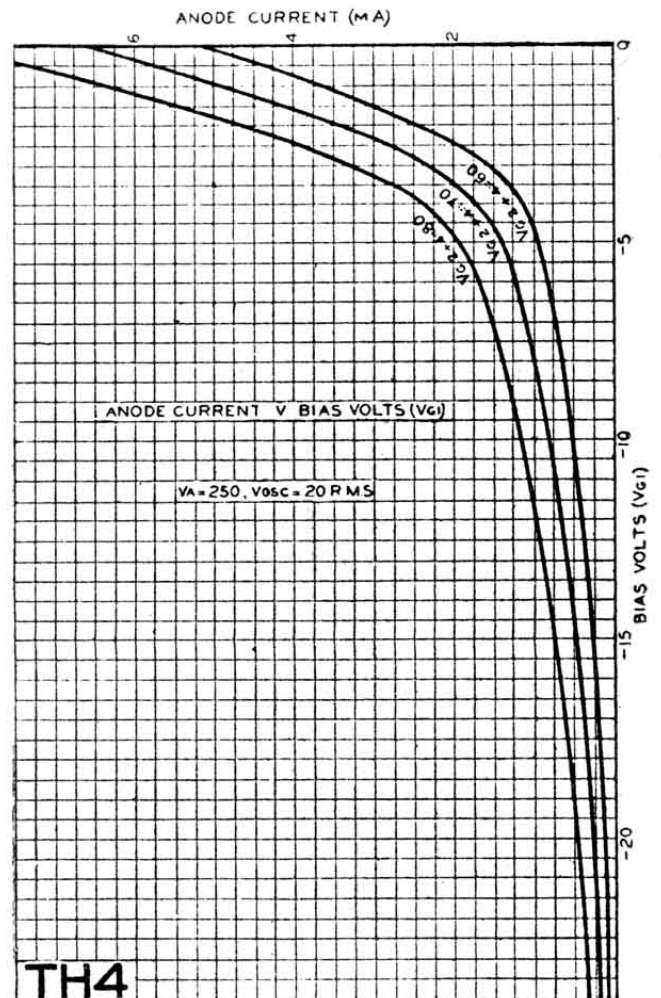

# PRICE 15/-