

# 2D.2



# DOUBLE-DIODE DETECTOR

## OPERATING DATA.

Heater Voltage .. .. .	2.0 V.
Heater Current .. .. .	0.09 A.
Max. Diode Voltage .. .. .	125 V.
Max. Diode Current .. .. .	0.5 mA.

## BASE.


Standard 5-pin. For connections see page 109.

## BULB FINISH.

This valve is supplied with metallised bulb only.

## APPLICATION.

The 2D2 is an indirectly heated double-diode valve. The two diode Anodes surrounding a common cathode. One diode is intended to be used as speech rectifier and the other can be used for the application of delayed A.V.C.

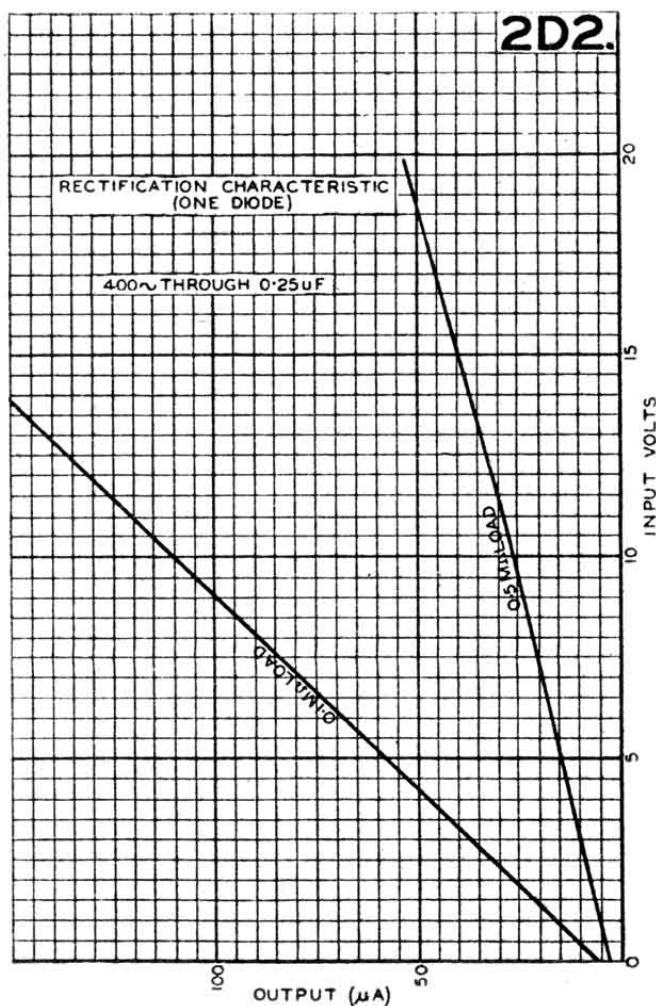

# PRICE 5/6