


T.H.13C



TRIODE-HEXODE FREQUENCY CHANGER

OPERATING DATA.

Heater Voltage	13.0 V.
Heater Current	0.31 A.
Max. Anode Voltage	250 V.
Max. Screen Voltage (Grids 2 and 4)	90 V.
Max. Oscillator Anode Voltage			150 V.

BULB FINISH.


The T.H.13C is supplied with a metallised bulb only.

APPLICATION.

As frequency changer in super-heterodyne receivers covering short wavebands. It consists of a hexode mixer and triode oscillator located on a common cathode assembly with adequate screening between each electrode system. It maintains its efficiency excellently at the higher frequencies.

BASE.

Standard 7-pin type. For connections see page 110.

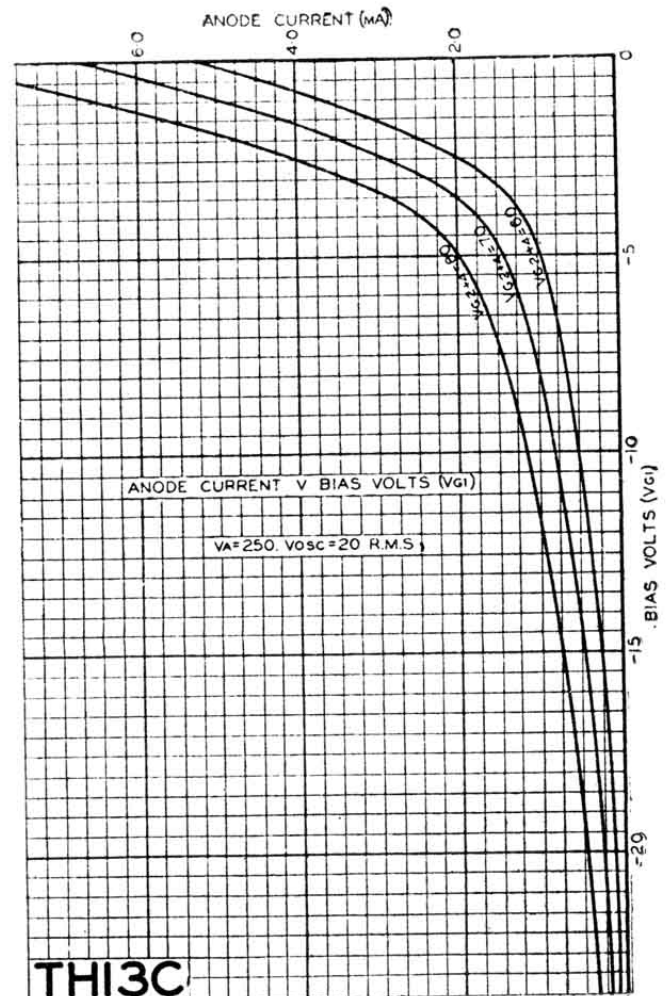

PRICE 15/-