

# H.F. PENTODE



# S.P.13C

## OPERATING DATA.

Heater Current .. .. 0.2 A.  
Heater Voltage .. .. 13.0 V.  
Max. Anode Voltage .. .. 200 V.  
Max. Auxiliary Grid Voltage .. 200 V

## CHARACTERISTICS.

At Anode Volts 200 ; Auxiliary Grid Volts 200 ; Control Grid Volts Zero.  
Mutual Conductance 4.0 mA/V.

## APPLICATION.

The S.P.13C is a straight H.F. Pentode for use in D.C./A.C. or Car Radio Receivers as :


- (a) Speech Detector.
- (b) Radio Frequency or Intermediate Frequency Amplifier.
- (c) Low Frequency Amplifier.

## BASE.

Standard 7-pin base. For connections see page 110.

## BULB FINISH.

This valve is supplied with metallised bulb only.

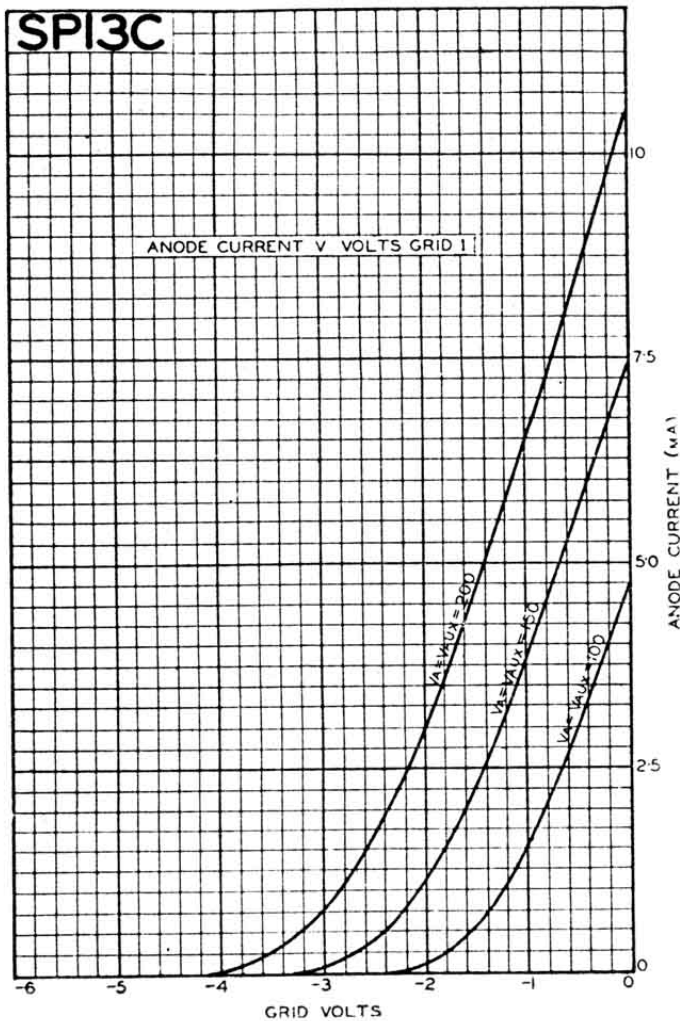

# PRICE 12/6