

# T.T.4

# LOW IMPEDANCE TRIODE



### OPERATING DATA.

Heater Voltage	.. ..	4.0 V.
Heater Current	.. ..	1.0 A.
Max. Anode Voltage	.. ..	250 V.

### BASE.

Standard 5-pin.

### BULB FINISH.

The T.T.4 is supplied with a clear bulb only.

### CHARACTERISTICS.

At Anode Volts 100 ; Grid Volts Zero.

Anode Impedance	2,200 ohms.
Amplification Factor	12
Mutual Conductance	5.5 mA/V.

### APPLICATION.


As output or voltage amplifier valve in A.C. mains operated equipment.

(1) Class "A" Output operated at an anode voltage of 250 V. and an anode load of 10,000 ohms.

For auto-bias a resistance of 800 ohms should be used.

(2) R.C. Amplifier operated with a line voltage of 250 V. and an anode resistance of 80,000 ohms.

For auto-bias a resistance of 9,000 ohms should be used.

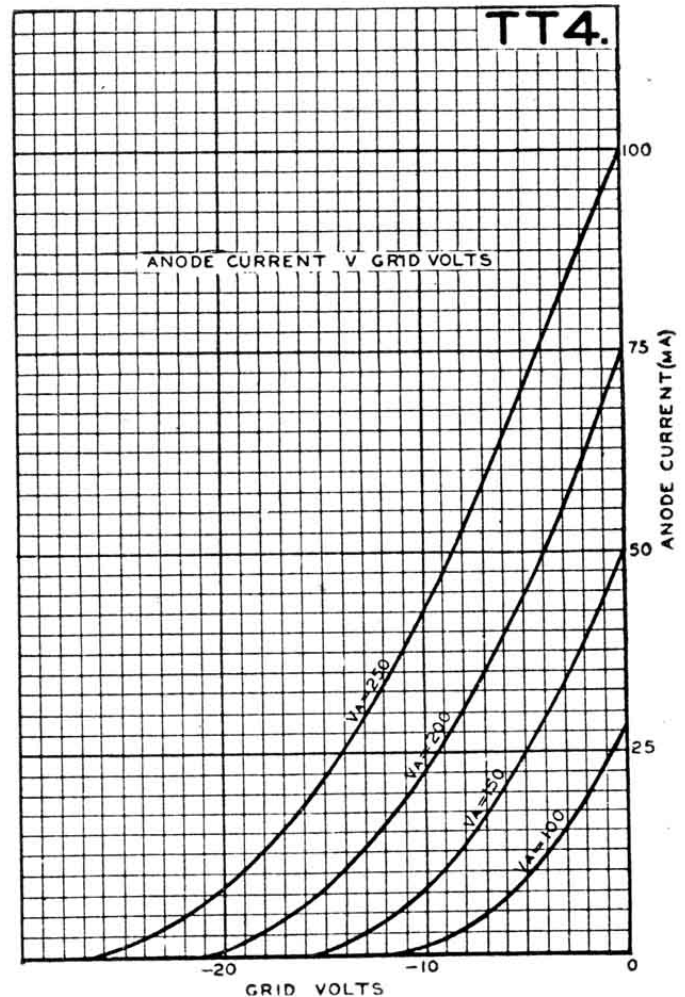

## PRICE 10/-