


DOUBLE-DIODE DETECTOR




2D.13C

OPERATING DATA.

Heater Voltage	13.0 V.
Heater Current	0.2 A.
Max. Diode Voltage	200 V.
Max. Diode Current	0.8 mA.

APPLICATION.

The 2D.13C consists of two diode anodes surrounding a common cathode. One diode is intended to be used as speech rectifier and the other can be used for the application of A.V.C. or noise suppression.

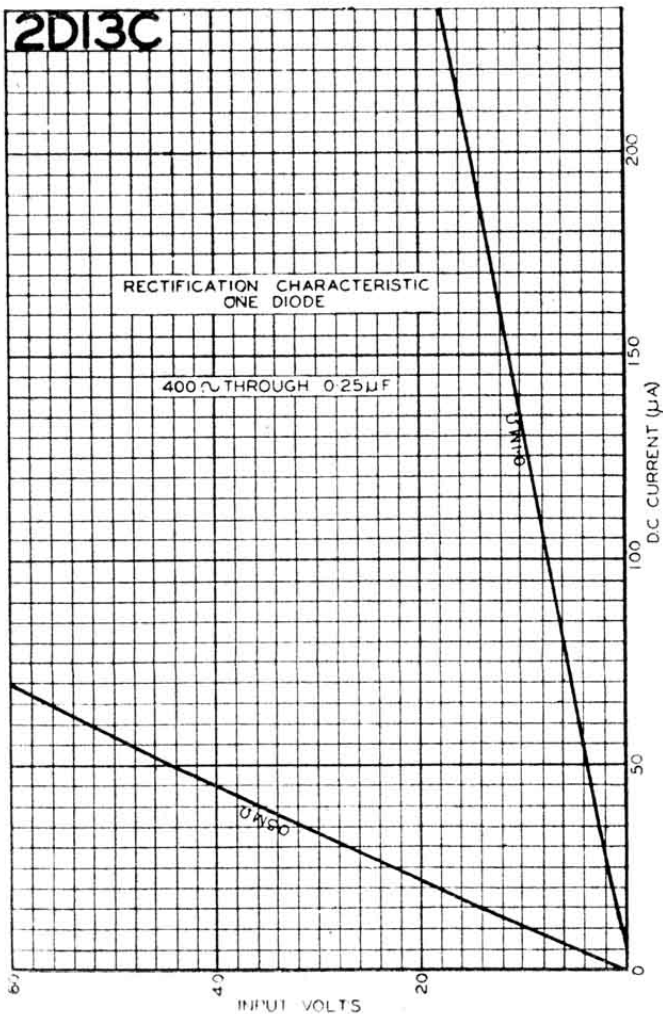

BASE.

Standard 5-pin. For connections see page 109.

BULB FINISH.

The 2D.13C is supplied with metallised bulb only.

PRICE 5/6