

D.A.I

MEDIUM IMPEDANCE TRIODE FOR DEAF AIDS



OPERATING DATA.

Filament Voltage	2.0 V.
Filament Current	0.05 A.
Max. Anode Voltage	100 V.

APPLICATION.

As low frequency amplifier in compact equipment such as Deaf-Aids, etc.

The DAI is supplied in a metal case.


Overall dimensions being :—

Length	60 mm.
Diameter	19 mm.

CHARACTERISTICS.


At Anode Volts	45
Control Grid Volts	0
Anode Impedance	..	60,000 ohms.
Amplification Factor	30
Mutual Conductance	..	0.5 mA/V.

BASE CONNECTIONS.



Viewed from underside of valve base

- Pin No. 1. Anode.
- 2. Grid.
- 3. Filament.
- 4. Filament.

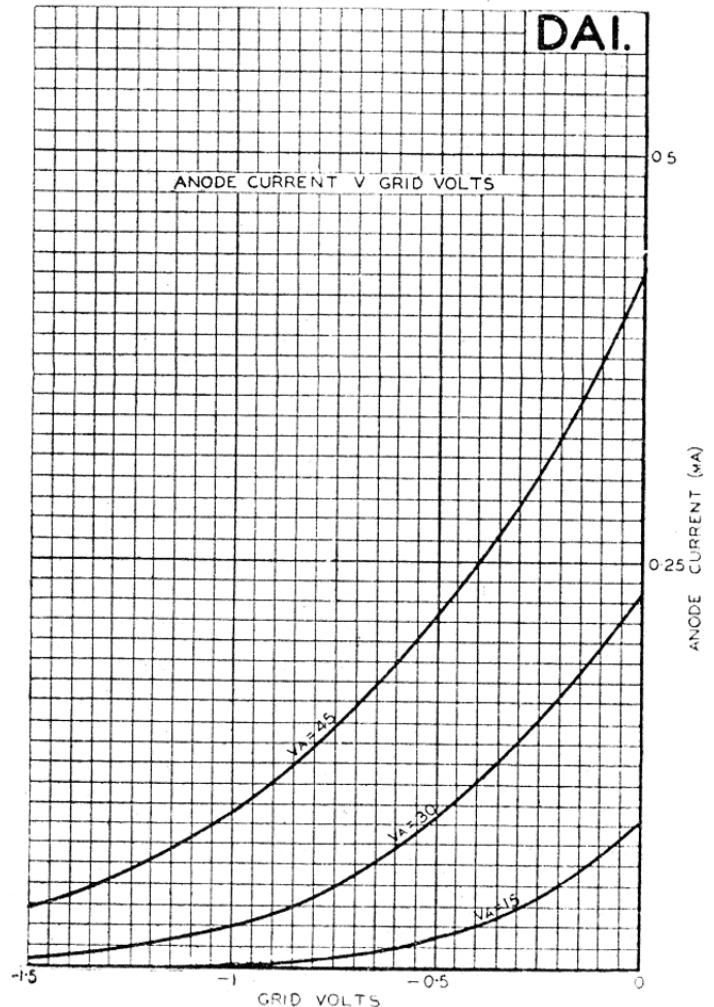

PRICE 15/-