

**HIGH SLOPE H.F. PENTODE
FOR TELEVISION RECEIVERS**




M.T.S.P.4

OPERATING CHARACTERISTICS.

Heater Voltage	4.0 V.
Heater Current	1.3 A.
Max. Anode Voltage	250 V.
Max. Aux. Grid Voltage	250 V.

APPLICATION.

A general purpose valve for use as high frequency or intermediate frequency amplifier, and as an output valve operating the cathode ray tube in Television receivers.

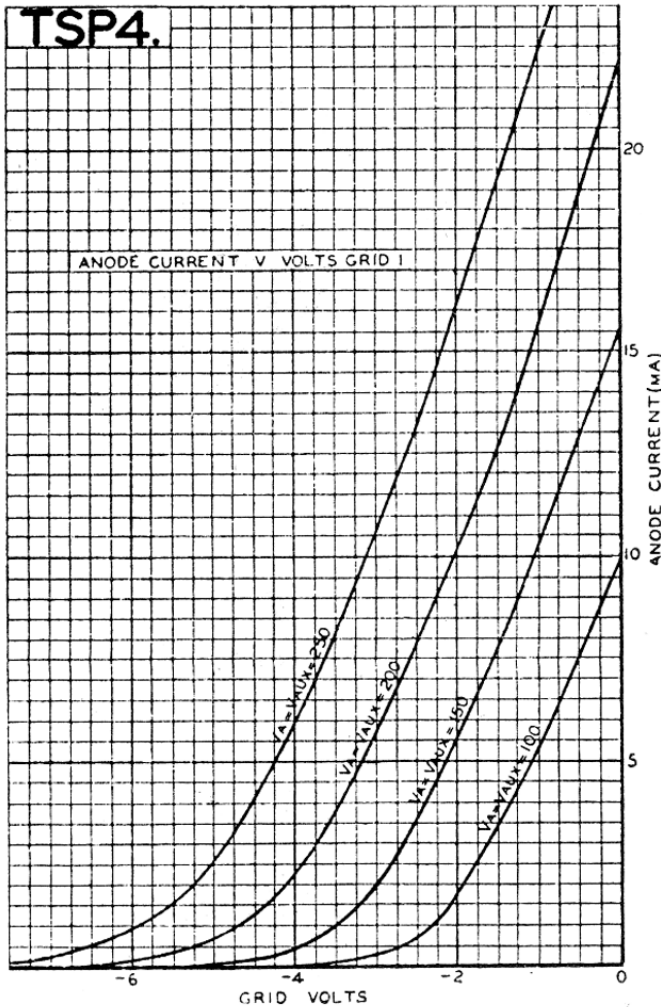

CHARACTERISTICS.

At Anode Volts	250
Aux. Grid Volts	250
Control Grid Volts	0
Mutual Conductance	7.1 mA/V.

BASE.

Standard 7-pin base, for connections see page 110.

BULB FINISH.

This valve is supplied with a metallised bulb.

PRICE 17/6