

TYPE P.M. 12A


MULLARD SCREENED GRID VALVE

OPERATING DATA

Filament Voltage ... 2.0 V.
 Filament Current ... 0.18 A.
 Max. Anode Voltage 150 V.
 Screen Voltage :
 (For Anode Voltage
 150 V.) ... 90 V.
 (For Anode Voltage
 100 V.) ... 70 V.

CHARACTERISTICS

(At Anode volts 125; Screen volts
 75; Grid volts Zero.)
 Anode Impedance 330,000 ohms
 Amplification Factor ... 500
 Mutual Conductance 1.5 mA./V

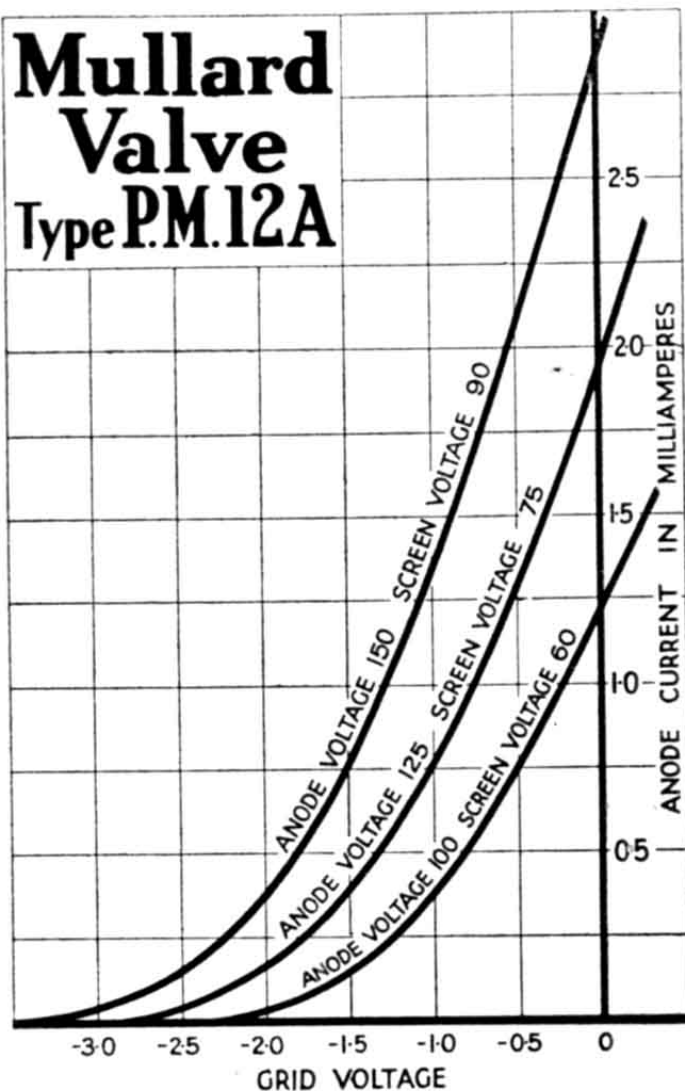

GRID BIAS.

No negative grid bias should be applied to the P.M.12A. If provision for grid bias to the screened grid valve is already included in the receiver, the valve will give an inferior performance until the bias is removed.

PRICE 15/6



Mullard
THE MASTER VALVE

