


MULLARD TYPE D.W.3 DIRECTLY HEATED FULL WAVE RECTIFIER VALVE

APPLICATION. Full wave rectifier in A.C. mains receivers and H.T. supply units giving an output in excess of that available from a D.W.2 rectifier.

DW4/350. R4.R2.

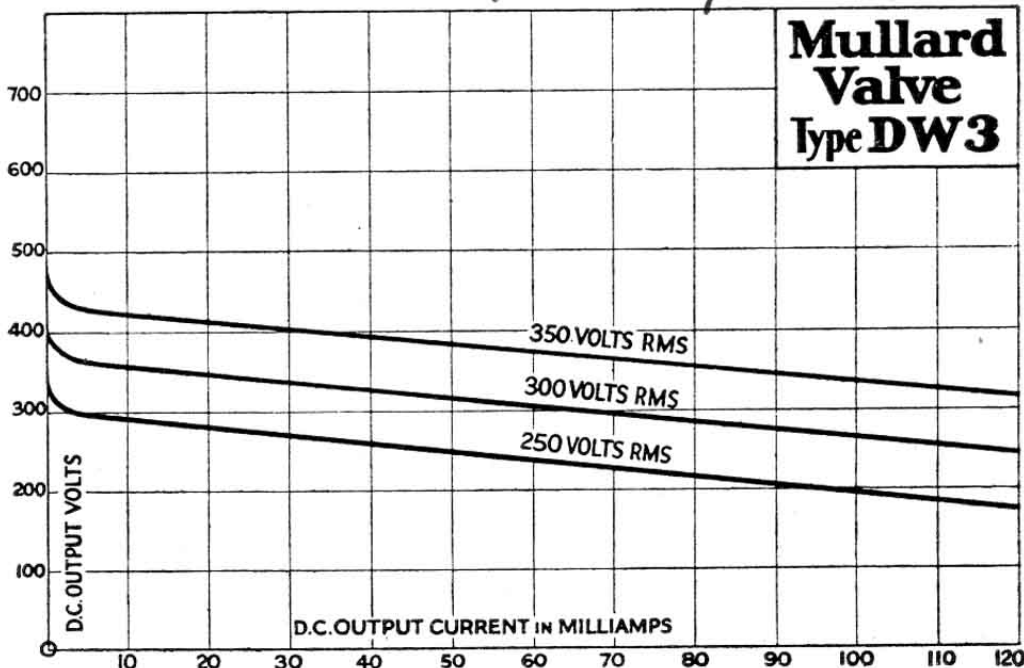

*R43. V11
1567.*

OPERATING DATA.

Filament Voltage ... 4.0 V.
 Filament Current ... 2.0 A.
 Max. Anode Voltage 350-0-350 V.
 R.M.S.

OUTPUT.

Maximum rectified output
 120 mA. D.C. at 350 V.

PRICE 15/-



Mullard

THE MASTER VALVE

