


TYPE MULLARD D.W.4 DIRECTLY HEATED FULL WAVE RECTIFIER VALVE

APPLICATION. Full wave rectifier in A.C. receivers and H.T. supply units (eliminators) providing anode current for valves operating at H.T. voltages up to 500 V.

DW4/500

R3-R4

V14.156

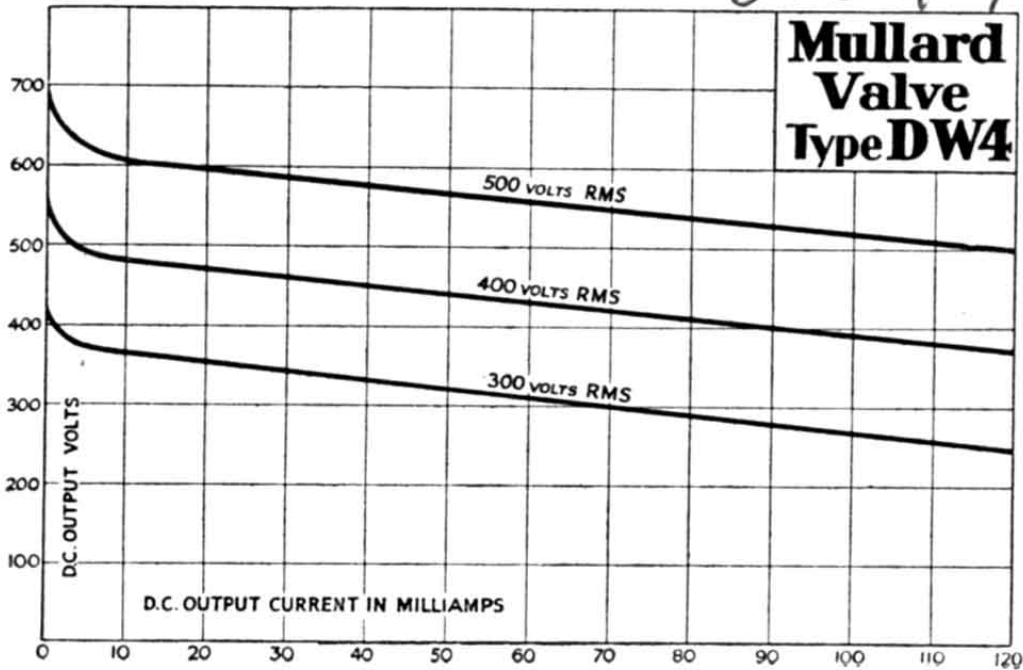

OPERATING DATA.

Filament Voltage ... 4.0 V.
 Filament Current ... 2.0 A.
 Max. Anode Voltage 500-0-500 V.
 R.M.S.

OUTPUT.

Maximum rectified output
 120 mA. D.C. at 500 V.

PRICE 20/-



Mullard
THE MASTER VALVE

