


# TYPE MULLARD I.W.3 INDIRECTLY HEATED FULL WAVE RECTIFIER VALVE

APPLICATION. As full wave rectifier in A.C. mains receivers or H.T. supply units (eliminators) where the total load does not exceed 120 mA. at 350 volts.

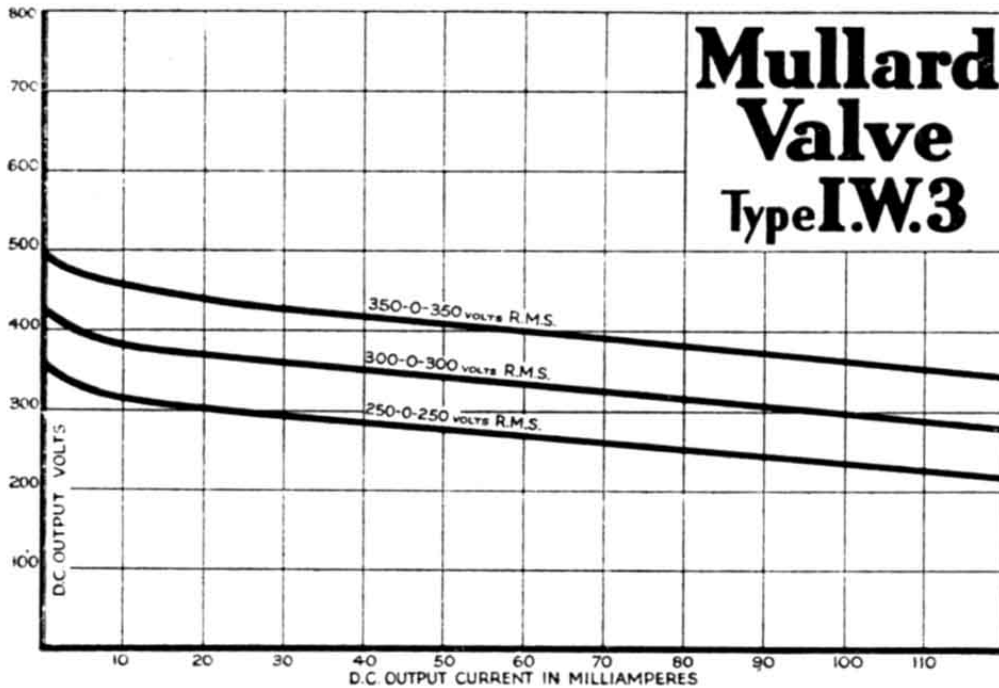

## OPERATING DATA.

Heater Voltage ... .. 4.0 V.  
 Heater Current ... .. 2.4 A.  
 Max. Anode Voltage 350-0-350 V.  
 R.M.S.

## OUTPUT.

Maximum rectified output  
 120 mA. D.C. at 350 volts.

**PRICE 15/-**



**Mullard**  
**THE MASTER VALVE**

